



## SR61HD DPM

### High Density & DPM Optimized Industrial Handheld Scanner Family

When it comes to tracking your most valuable assets through their lifecycle, direct part marking (DPM) offers permanence no other label format can match. The SR61HD DPM scanner features optimized optics to reliably scan DPM marks that are dot peened, etched or cast on a variety of substrates. Like all models in the SR61 family, the SR61HD DPM is:

- **Fast** – cutting-edge imager scans 1D and 2D bar codes with unmatched motion tolerance and fast time-to-read, while also supporting image and real-time video capture
- **Optimized** – customized imaging engine scans dot peened, chemical- or laser-etched direct part marks on a variety of substrates—and can even read small, reflective and low-contrast marks
- **Rugged** – designed to withstand drops from 6.5 feet, hot and cold temperature extremes, constant forklift vibration and windblown dust and rain
- **Easy to use** – highly visible aimer makes spotting bar codes fast and efficient
- **Ergonomic** – comfort grip and omni-directional scanning capability improve operator efficiency

The Intermec SR61HD DPM handheld scanner is a customized variant of the SR61 family, capable of scanning high density bar codes and direct part marks commonly used to track assets in defense, aerospace, automotive, pharmaceutical, and telecommunications industries. Since this scanner is built on a common hardware platform, it is a much more cost-effective solution for scanning direct part marks when compared to specialized, purpose-built devices.

With a customized imager, the SR61HD DPM can reliably scan marks applied with a variety of manufacturing processes: dot peening, chemical etching, laser etching, casting, engraving or stenciling—while still providing snappy performance on standard bar codes. The high performance imager is capable of scanning very fine marks (as small as 3 mils for 1D codes and 5 mils for DataMatrix codes), features unmatched motion tolerance (up to 500 in/sec) for incredible responsiveness, and includes advanced built-in capabilities that increase scanner versatility: data parsing, multi-code reading, and image/video capture.

Like all SR61 scanners, the SR61HD DPM features a high impact housing and a solid state design that exceeds industrial and military standards and can be counted on to perform well in harsh environments where dust, moisture or extreme temperatures are the norm.

The flexibility of the SR61 family translates into increased productivity, while keeping costs down. Seamless integration with Intermec computers, printers, and standard PCs is supported. Additionally, users may connect to a multitude of host devices running inventory management, picking, shipping and receiving, cross docking, work-in-process, tool crib, and pallet tracking applications.

To save time during deployment, the SR61 family includes Intermec's exclusive EasySet™ software setup tool for rapid configuration and personalization of your scanner system. Quickly set security options, symbology choices, beeper tones and volume, specify good read and error read responses, and make many other customizations.

Government and industry mandates—such as UID, ATA, Spec 2000, and AIAG B11—have led to the widespread adoption of direct part marks as the de facto standard for tracking high value or mission critical assets. Now, you can affordably meet these regulations with the SR61HD DPM, built on the proven SR61 industrial bar code scanner platform.

## Comprehensive Support Services Available

Intermec bar code scanners operate in dynamic business environments, and a support plan can protect you from unforeseen contingencies. *Intermec Medallion® Service* programs deliver the highest levels of productivity, device reliability, and uptime. The *Medallion® Complete* support package covers hardware failure, general wear and tear and accidental damage. For more information, visit [www.intermec.com/services](http://www.intermec.com/services).

### Physical Characteristics – Tethered Models

**Dimensions (LxWxH):**  
19.4 cm (7.6 in) x 7.2 cm (2.8 in) x 13.1 cm (5.2 in)  
**Weight:** 320 gm (11.2 oz)

### Physical Characteristics – Wireless Models

**Dimensions (LxWxH):**  
17.8 cm (7 in) x 7 cm (2.75 in) x 11.4 cm (4.5 in)  
**Weight (without battery):** 425 gm (15 oz)

### Power – Tethered Models

**Power Requirements:** 5V DC, 1.7A

### Power – Wireless Models

**Battery Type:** Lithium-ion  
**Battery Life:** 10+ hours per full charge  
**Recharge Time:** 2.5 hours for 90% charge

### Connectivity

Connects to Intermec computers and printers, as well as standard PCs.

### Interfaces – Tethered Models

RS232, USB 2.0 (HID Keyboard, Virtual Com Port, Video Class), Keyboard Wedge, Wand Emulation

### Interfaces – Wireless Models

SPP, HID Keyboard


### Radio – Wireless Models

**Frequency Band:** 2.4 GHz  
**Type:** Bluetooth class 1 version 2.1 + EDR  
**Range (Class 1):** 100 m (325 ft) in open space, 30 m (100 ft) in typical work environment  
**Features:** Adaptive frequency hopping

## Scan Engine Options

SR61xDPM - High Definition Area Imager (EA30HD)

### Scan Range – Typical reading distances at 200 lux

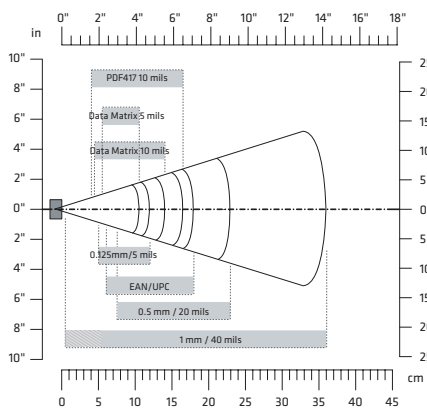

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.076 mm (3 mils)	5.5 cm (2.17 in)	9 cm (3.54 in)
	0.1 mm (4 mils)	5 cm (1.97 in)	10.5 cm (4.13 in)
	0.125 mm (5 mils)	5 cm (1.97 in)	12 cm (4.72 in)
	0.5 mm (20 mils)	7.5 cm (2.95 in)	23 cm (9 in)
	1 mm (40 mils)	* cm (14.17 in)	36 cm (14.17 in)
EAN 100%	0.33 mm	6 cm (2.36 in)	18 cm (7.09 in)
PDF417	0.125 mm (5 mils)	5 cm (1.97 in)	12.5 cm (4.92 in)
	0.25 mm (10 mils)	4 cm (1.57 in)	16.5 cm (6.5 in)
	0.38 mm (15 mils)	6 cm (2.36 in)	20.5 cm (8.07 in)
DataMatrix	0.125 mm (5 mils)	5.5 cm (2.17 in)	10.5 cm (4.13 in)
	0.25 mm (10 mils)	4.5 cm (1.77 in)	14 cm (5.51 in)

\*Depends on symbology length and scan angle.

## Supported Bar Code Symbolologies

**1D & Stacked:** Codabar; Codablock; Code 11; Code 128 (GS1-128); Code 39; Code 93/93i; EAN/UPC; GS1 DataBar Expanded; GS1 DataBar Limited; GS1 DataBar Omni-Directional; GS1 DataBar Stacked; Interleaved 2 of 5; Matrix 2 of 5; Macro PDF; Micro PDF; MSI; PDF417; Plessey; Standard 2 of 5; Telepen; TLC39

**2D:** Aztec; DataMatrix; GS1 Composite; MaxiCode; QR Code

**Postal:** Australian Post; BPO; Canada Post; Dutch Post; Infomail; Intelligent Mail; Japan Post; Planet; Postnet; Sweden Post

### Environment

**Operating Temperature:**  
-20°C to +50°C (-4°F to +122°F)  
**Storage Temperature:**  
-40°C to +70°C (-40°F to +158°F)  
**Humidity:** 0% to 95% RH, non-condensing

### Shock & Vibration:

SAE Specification J1399 Class 3 (off road vehicle)

### Rain and Dust Resistance:

IP54  
Drop Survival: 26 drops onto concrete or steel surface from a height of 1.98 m (6.5 ft)

**Ambient light:** Works in any lighting conditions from 0 to 100,000 lux

### Standard Warranty

**Tethered Models (SR61T):** 3 years  
**Bluetooth Models (SR61B):** 3 years (90 days on battery)  
Extended protection available with Medallion support

### Accessories


For a full listing of compatible accessories, visit [www.intermec.com/sr61](http://www.intermec.com/sr61).

### Regulatory Approvals (SR61T)

Laser Class 2; CE Mark (EU) (EN 55024, EN 55022 Class B, IEC 60950-1, IEC 60825-1); CISPR 22 Class B; CQC (CH); cULus (CA/USA) (UL 60950-1); C-TICK (AU/NZ); GS Mark (DE) (EN 60950-1, EN 60825-1); KCC (KR); NOM (MX); Part 15 of FCC Rules, Class B

### Regulatory Approvals (SR61B)

Laser Class 2; ANATEL (BR); CE Mark (EU) (EN301489-17 V2.1.1, EN 300 328 V1.7.1, IEC60950-1, IEC60825-1); COFETEL (MX); cULus (CA/USA) (UL 60950-1); C-TICK (AU/NZ); KCC (KR); SRRS (CH); Part 15 of FCC Rules, Class B

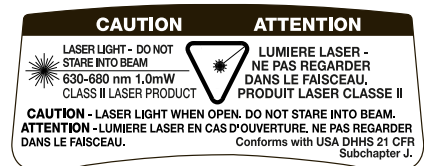

**North America**  
**Corporate Headquarters**  
6001 36th Avenue West  
Everett, Washington 98203  
Phone: (425) 348 2600  
Fax: (425) 355 9551

**North Latin America**  
**Headquarters Office**  
Mexico  
Phone: (+52) 55 52 41 48 00  
Fax: (+52) 55 52 11 81 21

**South Latin America**  
**Headquarters Office**  
Brazil  
Phone: (+55) 11 3711 6776  
Fax: (+55) 11 5502 6780

**Europe, Middle East & Africa**  
**Headquarters Office**  
Reading, United Kingdom  
Phone: (+44) 118 923 0800  
Fax: (+44) 118 923 0801

**Asia Pacific**  
Headquarters Office  
Singapore  
Phone: (+65) 6303 2100  
Fax: (+65) 6303 2199

**Media Sales**  
EMEA: (+31) 24 372 3167  
USA: (513) 874 5882  
<http://intermec.custhelp.com>

**Sales**  
Toll Free NA: (800) 934 3163  
Toll in NA: (425) 348 2726  
Freephone ROW:  
00800 4488 8844

**OEM Sales**  
Phone: (425) 348 2762

**Customer Service and Support**  
Toll Free NA: (800) 755 5505  
Toll in NA: (425) 356 1799  
EMEA: intermec.custhelp.com

**Internet**  
[www.intermec.com](http://www.intermec.com)

**Worldwide Locations**  
[www.intermec.com/locations](http://www.intermec.com/locations)

Copyright © 2012 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. 612201-08/12

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.

